200M mini Passthrough
GP-L200MP
User Manual

GOLDWEB

Contents

1 Introduction 1
1.1 Product Features 1
1.2 Application 2
1.3 System Requirements 2
1.4 Packing List 3
2 Safety Precautions 4
3 Getting to Know the Adapter 6
3.1 Ethernet Interface 6
3.2 Adapter's Buttons 6
3.3 Adapter's LEDs 7
4 How to Install the Utility 9
5 How to Use the Utility 13
5.1 Main Tab 13
5.2 Privacy Tab 17
5.3 Diagnostics Tab 19
5.4 About Tab 21
6 How to Use the Security Pushbutton 23
6.1 Forming a HomePlug AV Logical Network 23
6.2 Joining a Network 24
6.3 Leaving a Network 25
7 How to Improve the Transmission Capacity 27
Appendix A Specifications 29
Appendix B Acronyms and Abbreviations 31
Appendix C About QoS 32

1 Introduction

The GP-L200MP is a mini-PLC pass-through adapter. It can transmit data up to 200 Mbps in the household power line. It can be connected to the power socket directly without wiring. The device provides a female socket by which you can connect your terminal or power stripe directly without an outlet. The GP-L200MP adapter can enter power save mode triggered by multiple conditions. The GP-L200MP adapter can help you to establish a high-speed network that supports video, voice and data without wiring and drilling. It is suitable for using in a wide range of both residential (at home) and commercial (offices, apartments, hotels, warehouses) network applications.

1.1 Product Features

- Without new wiring, every power socket becomes a connection node in the household.
- Plug-and-play to your routers, computers and other network devices.
- Integrating a female socket enables additional terminal devices or power stripe to be connected to the adapter just as a normal wall socket.
- Built-in noise filter splitter significantly improves the data transmission.
- Provides power saving mode. You are allowed to set different triggering modes and configure the parameters of power saving mode. In the power saving mode, the output consumption of the device is less than 1W. Especially, for the device with the upgrade version, the output consumption can be reduced to below 0.5W.

1.2 Application

- High Definition (HD) and Standard Definition (SD) video distribution
- Higher data rate broadband sharing for power line LAN
- Shared broadband internet access
- TV over IP (IPTV) and Voice over Internet Protocol (VoIP)

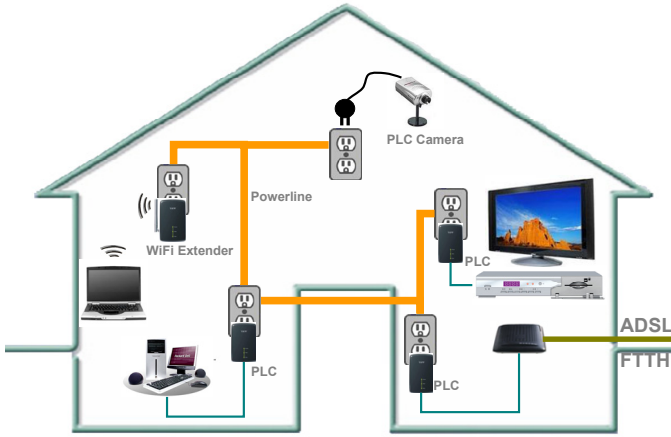

Figure 1 PLC network architecture

1.3 System Requirements

- Operating system: Windows 98SE, 2000, ME, XP 32/64 bit and Vista 32/64bit
- CPU: Intel Pentium III or better, clock rate faster than 2.0GHz recommended

- RAM: At least 128MB
- Screen resolution: Any resolution
- Free disk space: At least 20MB
- Network interface: At least one Fast Ethernet (100 Mbps) network card, and a Ethernet Cord

1.4 Packing List

- GP-L200MP x 2
- CD ROM x 1
- RJ45 Ethernet cable x 2

2 Safety Precautions

This device is intended for connection to the AC power line. For installation instructions, please refer to the installation section of this user manual. The following precautions should be taken when using this product.

- Read all instructions before installing and operating this product.
- Follow all warnings and instructions marked on the product.
- Unplug the device from the wall outlet before cleaning. Use a damp cloth for cleaning. Do not use liquid cleaners or aerosol cleaners.
- Do not operate this product near water.
- This product should never be placed near or over a radiator or heat register.
- Do not use an extension cord between the device and the AC power source.
- Only a qualified technician should service this product. Opening or removing covers may result in exposure to dangerous voltage points or other risks.
- Do not plug the device into a power strip or surge protector because these devices may consist of filter and impair signal.
- Avoid plugging the device right next to noisy sources such as cell phone charger, Halogen light, noisy desktop computer, vacuum cleaner, etc. this cases result in poor transmission speed.
- Unplug the device from the wall outlet and refer the product to qualified service personnel for the following conditions:

  - If liquid is spilled into the product

- If the product is exposed to rain or water
- If the product does not operate normally when the operating instructions are followed
- If the product exhibits a distinct change in performance

3 Getting to Know the Adapter

3.1 Ethernet Interface

Ethernet: The Ethernet port connects to an Ethernet network cable. The other end of the cable connects to your computer or other Ethernet-enabled network device.

3.2 Adapter's Buttons

The following table describes the adapter's buttons.

Figure 1 Side panel of the device

Security (also referred to as the NMK button)**:** Set the status of the device members.

- Pressing and holding the **Security** button for more than 10 seconds randomizes the NMK value.
- Pressing and holding the **Security** button for more than 3 seconds makes the adapter be a member of the existing AVLN. For more details, see chapter 6 .

Reset: Restore the factory default settings.

3.3 Adapter's LEDs

All adapter's LEDs are located on the front panel. There are 3 LEDs to indicate the adapter's status.

Figure 2 Top view

The following table describes the LEDs on the device.

LED	Color	Behavior	Description
Power	Green	On	System runs normally.
	Green	Blink	● System enters the power save mode. ● System is resetting. ● Password synchronization is in progress.
	-	Off	PLC adapter is powered off.
Ethernet	Green	On	Ethernet connection has established.
	Green	Blink	Data is being transmitted.
	-	Off	No Ethernet connection.
Data	Green/Red	On	The PLC adapter has connected to the power line network. The **Data** LED color will vary according to the physical rate. ● PHY RATE>40Mbps: green ● 20<PHY RATE<40Mbps: orange ● PHY RATE<20Mbps: red
	Red	Blink	When the device is scanning other PLC devices, the Data indicator blinks quickly.
	-	Off	The PLC adapter does not connect to the power line network.

Note:

The Power, Ethernet and Data indicators blink quickly when the device is powered on. At that moment, the Power and Ethernet indicators are green, and the Data indicator is orange.

When data is being transmitted, the Data indicator keeps on but does not blink.

4 How to Install the Utility

Note:

Before installing the PLC utility software, make sure that there is no any other power line utility installed on your computer. If there is another utility installed, please uninstall it and restart your computer.

Follow the steps below to install the utility. No password or CD-Key is needed.

Step 1 Please insert the utility CD into the computer's CD-ROM drive. Select the **PLC 200AV Utility Installation** folder and then double-click the setup.exe. A page for installing the utility software appears.

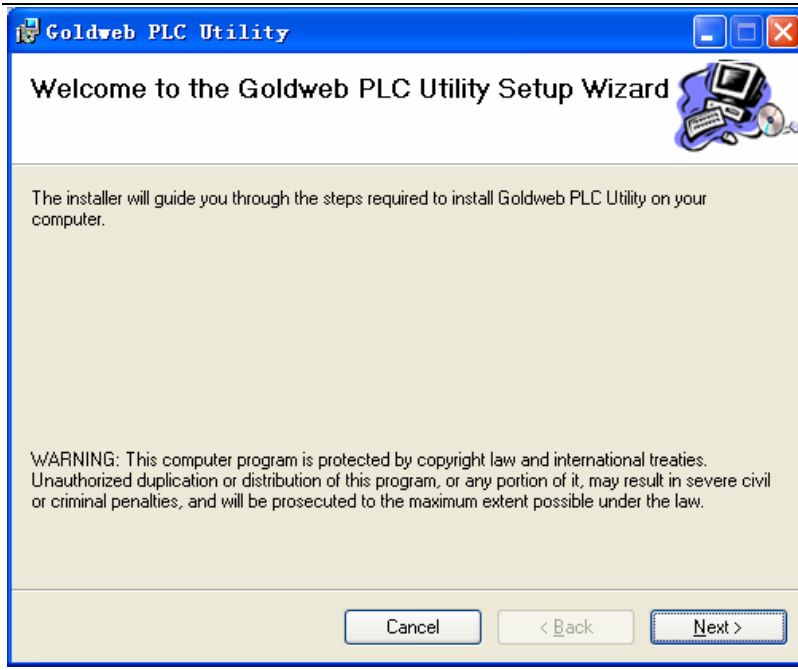
Goldweb PLC Utility
Welcome to the Goldweb PLC Utility Setup Wizard
The installer will guide you through the steps required to install Goldweb PLC Utility on your computer.
WARNING: This computer program is protected by copyright law and international treaties. Unauthorized duplication or distribution of this program, or any portion of it, may result in severe civil or criminal penalties, and will be prosecuted to the maximum extent possible under the law.
Cancel
< Back
Next >

Figure 3 Opening the setup wizard

Step 2 Click **Next >** to show the following page.

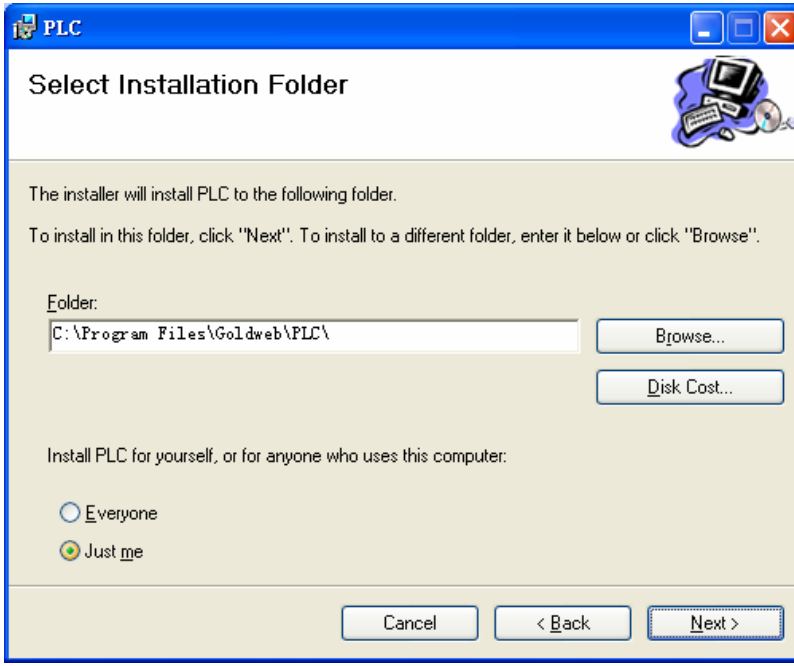
PLC
Select Installation Folder
The installer will install PLC to the following folder.
To install in this folder, click "Next". To install to a different folder, enter it below or click "Browse".
Folder:
C:\Program Files\Goldweb\PLC\
Browse...
Disk Cost...
Install PLC for yourself, or for anyone who uses this computer:
Everyone
Just me
Cancel
< Back
Next >

Figure 4 Selecting the folder

Step 3 Click **Browse…** to select the installation folder, and then click **Next >** to continue.

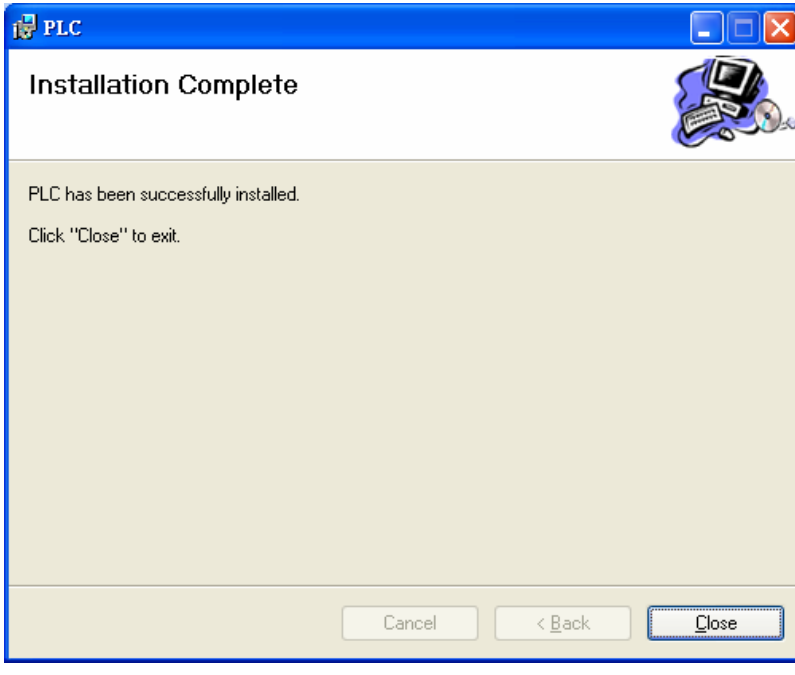

Figure 5 Completing the installation

Step 4 Click **Close** to complete the installation.

5 How to Use the Utility

5.1 Main Tab

The **Main** screen provides a list of all power line devices logically connected to the computer when the utility is running.

The **top panel** shows the local HomePlug devices connected to the network interface card (NIC) of the computer. Click **Connect**. The utility automatically scans the power line periodically for other HomePlug devices when it is connected to the local device. If no local HomePlug device is discovered, the status bar displays **NO HOMEPLUG ADAPTERS DETECTED.**

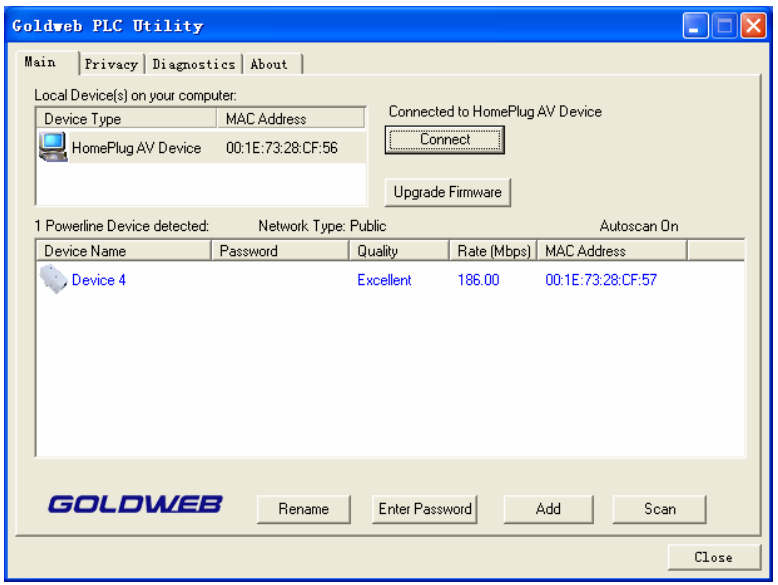

Figure 6 Main tab

The **lower panel** displays all the HomePlug remote devices, which are discovered in the current logical network. The total number of remote devices connected in the same network is displayed above the remote device panel. **Network type** (**Public** or **Private**) depends on the network status of the local device. **Autoscan** shows whether the autoscan function is on. The following information is displayed for all the devices that appear in the lower panel.

Device Name

This column shows the default device name, which may be modified. To change the name, click **Rename**, or click the name and edit it in the list.

MAC Address

This column shows the MAC addresses of the remote devices.

Password

By default, this column is blank. You can click **Enter Password** to change it. The steps for setting the password of the device (required when creating a private network) are as follows:

Step1 Click the device name to select the device in the lower panel.

Step2 Click **Enter Password**. A dialog box appears, showing the device name and password. See Figure 7.

Figure 7 Setting the device password

Step3 Click **OK** to verify the password. The password field accepts the device password in any case formats, with or without dash.

A confirmation box appears if the password is entered correctly. If a device is not found, a message appears, providing suggestions to solve the common problems. This process might take a few seconds to get completed.

Add

This button is used to add a remote device to the existing network by entering the device password of the device. A dialog box appears. See Figure 8. You can enter a device name and the password.

If the device is found and the password is entered correctly, a confirmation box appears. If a device is not found, a message appears, providing suggestions to solve

the common problems.

Figure 8 Adding the remote device

Note:

The device must be in the power line (plugged in), so that you can confirm the password and add the device to the network. If the device is not located, a warning message appears.

Scan

This button is used to perform an immediate search for HomePlug devices connected

to the power line network. By default, the utility automatically scans every a few seconds and updates the displayed information.

5.2 Privacy Tab

In the **Privacy** screen, you can maintain security for the logical network and select the device included in the network. See Figure 9.

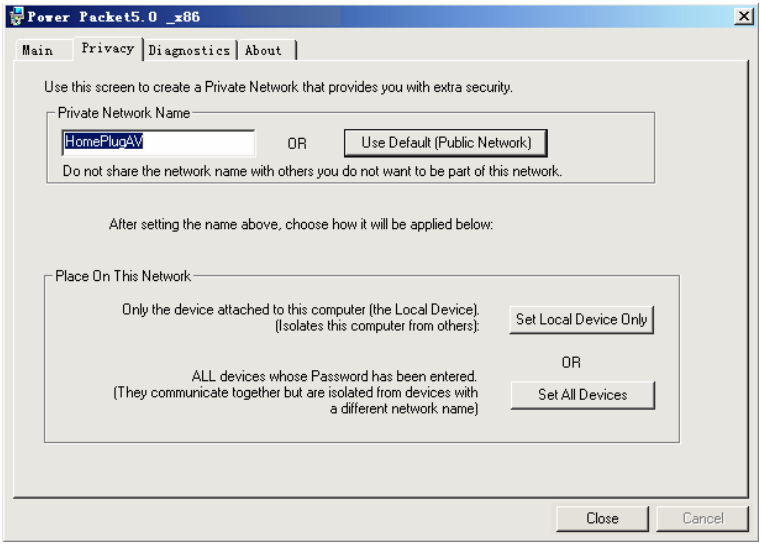
Power Packet5.0 _x86
Main
Privacy
Diagnostics
About
Use this screen to create a Private Network that provides you with extra security.
Private Network Name
HomePlugAV
OR
Use Default (Public Network)
Do not share the network name with others you do not want to be part of this network.
After setting the name above, choose how it will be applied below:
Place On This Network
Only the device attached to this computer (the Local Device).
(Isolates this computer from others):
Set Local Device Only
OR
ALL devices whose Password has been entered.
(They communicate together but are isolated from devices with a different network name)
Set All Devices
Close
Cancel

Figure 9 Privacy tab

All HomePlug devices are loaded using a default logical network (network name), which is normally **"HomePlug"**. In the **Privacy** screen, you can modify a private network by changing the network names and the passwords of the devices.

You can always reset to the HomePlug network (Public) by entering "HomePlug" as the network name or by clicking on the **Use Default** button.

Note:

*If the network name changes to anything other than HomePlug, the network type in the main screen is displayed as **Private**.*

Set Local Device Only

This button is used to change the network name and password of the local device. If a new network password is entered, all the devices appeared in the main panel prior to this are no longer present in the new network, effectively making the local devices not to communicate to the devices which are in the old logical network. Click **Set Local Dive Only**, the devices previously set up with the same logical network (same network name) appears in the device list.

Set All Devices

This button is used to change the logical network of all devices that appear in the main panel. If these devices whose passwords have been entered for the same logical network, a dialog box appears, indicating the success of this operation. For the devices whose passwords are not entered, this operation will fail and it will report a failure message.

5.3 Diagnostics Tab

The **Diagnostics** screen shows the system information and history of all remote devices appeared over a period of time. See Figure 10.

The **Upper panel** shows technical data concerning software and hardware on the host computer that are used to communicate through HomePlug on the power line network. It includes the following:

- Operating system platform/version
- Host network name
- User name
- MAC address of all NICs (Network interface card) connected to the host
- Identify versions of all driver DLLs and libraries used (NDIS) and optionally
- HomePlug chipset manufacturer name (Turbo Only devices)
- MAC firmware version (Turbo Only devices)
- MAC addresses of all devices connected locally to the host
- Version of the configuration utility
- Vendor name

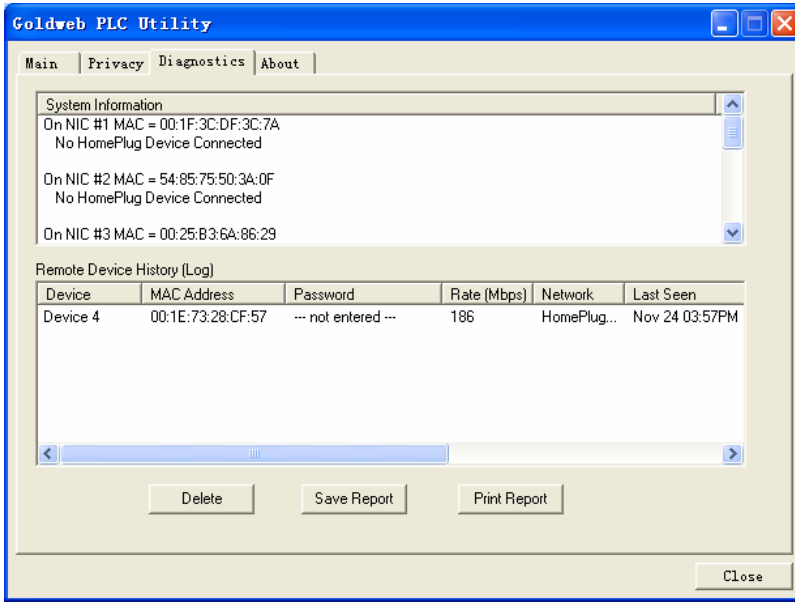

Figure 10 Diagnostics tab

The **Lower panel** displays the history of all remote devices appeared on the computer over a certain period of time. All the devices and the parameters of the devices on the power line network are listed. Devices that are active on the current logical network show a transfer rate in the rate column. Devices on other networks, or devices that no longer exist are shown with a "?" in the rate column. The following remote device information is available from the diagnostics screen:

- Device alias name
- MAC address
- Password
- Device last known rate
- Device last known network name

- HomePlug chipset manufacturer name
- Date device last seen on the network
- MAC firmware version

The diagnostics information displayed can be saved to a text file for later use, or be printed for reference for a technical support call. Click **Delete** to delete the devices which are no longer part of the network. A dialog window pops up with a confirmation message if the user wants to delete a device whose password has been entered.

5.4 About Tab

The **About** screen shows the software version and provides a html link to a website, such as *www.goldwebcn.com*. Clicking the web address, you can visit the web site.

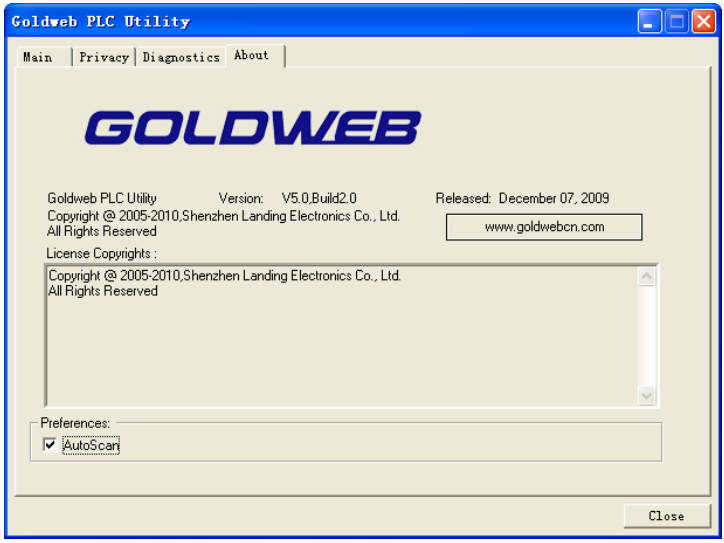

Figure 11 About Tab

Preferences

The lower part of the panel displays options for turning the autoscan function on or off.

6 How to Use the Security Pushbutton

This section describes how to add new devices to, or remove old devices from a HomePlug AV logical network (AVLN). Both can be accomplished by using a **Security** (NMK) pushbutton.

Operation progress and outcome can be monitored by observing the behavior of the power LED.

6.1 Forming a HomePlug AV Logical Network

When two devices with different NMK values are connected to the same power line, the user wants them to form a logical network. Do as follows:

Step1 Press the NMK button on the first device A for less than 3 seconds.

Step2 Press the NMK button on the second device B for less than 3 seconds. The button on B must be pressed within 1 minute

Step3 Wait for connection to complete.

The power LEDs on both devices will flash evenly at 1-second intervals until the operation succeeds or fails. They will illuminate steadily on successful completion. If an error occurs, the power LED on the ‘adder’ will flash unevenly until the pushbutton on the ‘adder’ is pressed again or the ‘joiner’ is reset by holding the pushbuttons down for more than 10 seconds.

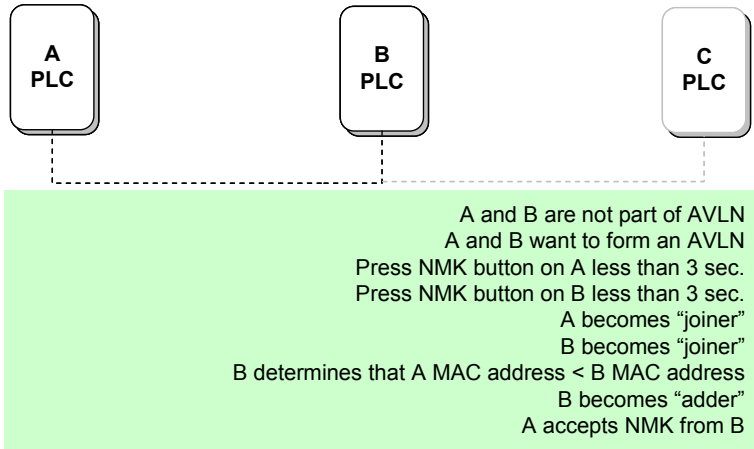
A
PLC
B
PLC
C
PLC
A and B are not part of AVLN
A and B want to form an AVLN
Press NMK button on A less than 3 sec.
Press NMK button on B less than 3 sec.
A becomes “joiner”
B becomes “joiner”
B determines that A MAC address < B MAC address
B becomes “adder”
A accepts NMK from B

Figure 12 Forming a HomePlug AV logical network

6.2 Joining a Network

In this scenario a network exists, a new device, the ‘joiner’, wants to join the network. Any device on the existing network can become the ‘adder’.

Step1 Press the NMK button on the ‘joiner’ for at least 3 seconds.

Step2 Press the NMK button on any network device for less than 3 seconds, making it the ‘adder’. Please press this pushbutton within 1 minute.

Step3 Wait for connection to complete.

The power LEDs on both devices will flash at 1-second intervals until the process succeeds or fails. They will illuminate steadily on success. If an error occurs, the power LED on the ‘adder’ will flash unevenly until the pushbutton on the ‘adder’ is pressed again or the ‘joiner’ is reset by pressing the pushbutton for more than 10 seconds.

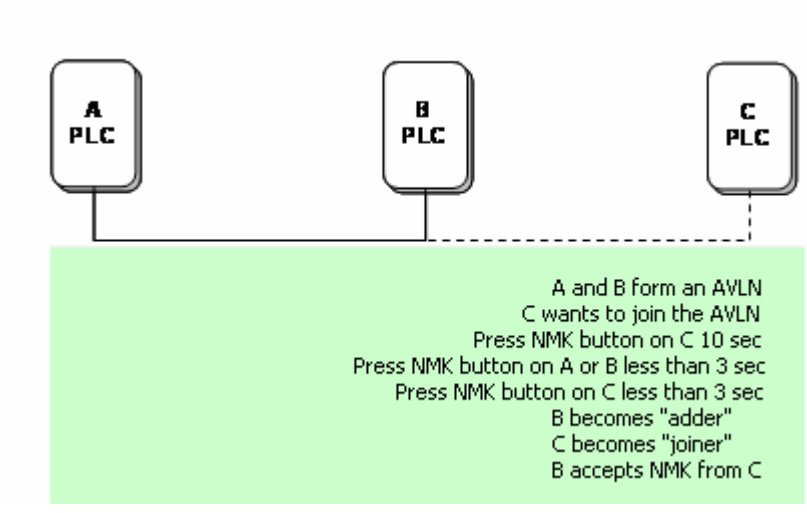
A
PLC
B
PLC
C
PLC
A and B form an AVLN
C wants to join the AVLN
Press NMK button on C 10 sec
Press NMK button on A or B less than 3 sec
Press NMK button on C less than 3 sec
B becomes "adder"
C becomes "joiner"
B accepts NMK from C

Figure 13 Joining a Network

6.3 Leaving a Network

Suppose that a network exists. You want to remove one device, the 'leaver', from that network, for whatever reason, and you may want to remove the device from service altogether or have it join another logical network. Do as follows:

Step1 Press the pushbutton on the 'leaver' for at least 10 seconds. The device will reset and restart with a random NMK.

Step2 Wait for reset to complete.

The power LED on the 'leaver' will momentarily extinguish during reset, flash during restart then illuminate steadily. No errors can occur.

Once the process completes, you may disconnect the device from the medium or join it to another logical network on the same medium.

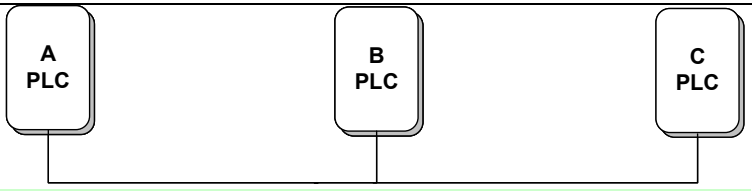

A, B and C form an AVLN
A wants to leave the AVLN
Press NMK button on A more than 10 sec.
A computes random NMK
A resets and restarts

Figure 14 leaving a Network

7 How to Improve the Transmission Capacity

It is important to use the PLC product complying with the following "correct rules", because it can significantly improve the transmission capacity of the network.

For the PLC device without female socket, it is recommended to plug the device directly into a wall socket, not to a power stripe.

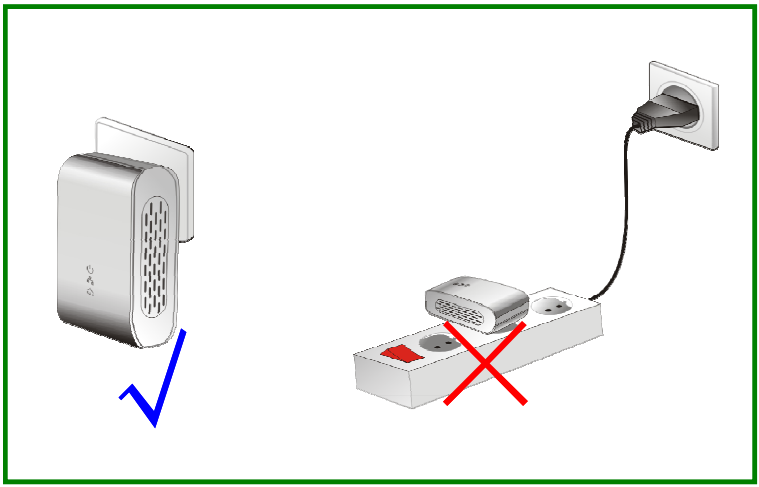

Figure 15 Connecting the PLC device without the female socket

For the PLC device with female socket, you should connect all additional network devices that are connected to a multiple socket to the main power supply via the electrical socket integrated into the PLC device with female socket. To take full advantage of the filter function, to improve data transmission in the network, always plug the power stripe into the female socket.

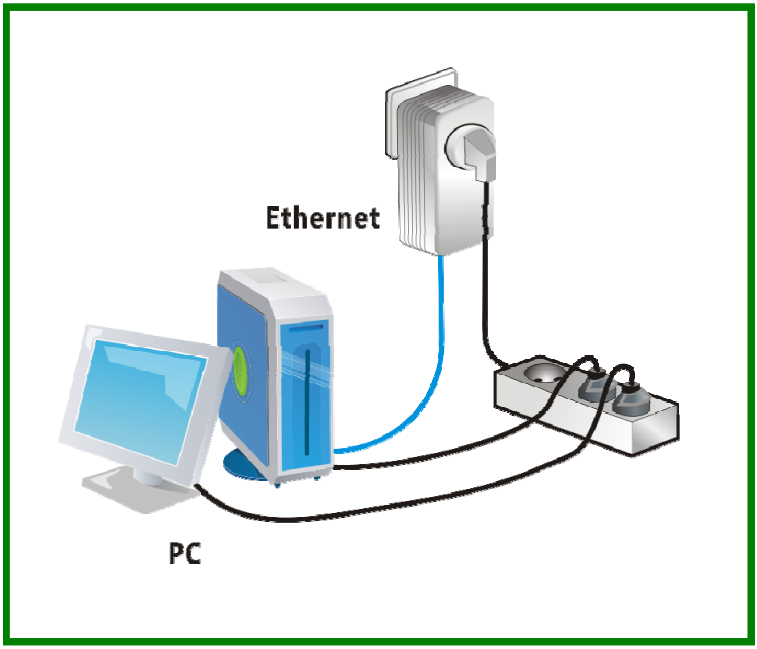

Figure 16 Connecting the PLC device with the female socket

Appendix A Specifications

Chipset	Intellon INT6400
Protocol	HomePlug AV 1.0 Co-exists with existing HomePlug 1.0
System Support	Windows 98SE, 2000, ME, XP 32/64 bit and Vista 32/64bit
PLC Rate	200Mbps
Modulation Band	2~30MHz
Modulation Schemes	Supports1024/256/64/16/8-QAM, QPSK, BPSK and ROBO
Encryption	128 AES
Outlet Current	220VAC 16A Maximum, 110VAC 20A Maximum
Filter Characteristics	-22 dB to~45 dB
LED Indicator	Power: Power supply status Ethernet: Ethernet link and activity Data: PLC link and activity
Push Button	Reset: Restore the factory default settings Security: Set the status of the device members.
Consumption	3.5W
Operating Temperature	0ºC to 45ºC

Storage Temperature	-20ºC to 70ºC
Operating Humidity	10% to 90%, non-condensing
Storage Humidity	5% to 95%, non-condensing
Input Rating	100-240 VAC, 50/60Hz
Certificate Compliance	CE, UL, FCC Part 15 Class B
Green Standard	RoHS
Physical Dimension	L×W×H: 105mm×58mm×41mm
Weight	233g

Appendix B Acronyms and Abbreviations

AVLN	AV In-home Logical Network, the AVLAN is the set of STAs that possess the same network membership key. Every AVLN is managed by a single CCo.
CCo	Central Coordinator
CSMA/CA	Carrier Sense Multiple Access / Collision Avoidance
DAK	Device Access Key
DM	Device Manager
IGMP	Internet Group Management Protocol
NEK	Network Encryption Key
NID	Network ID (Identification)
NMK	Network Membership Key
PLC	Power Line Communication
PIB	Parameter Information Block
STA	Station, a STA in the network with a connection to the power line and being able to source or sink traffic
TDMA	Time Division Multiple Access
TEI	Terminal Equipment Identifier
TOS	Type Of Service
VLAN	Virtual Local Area Network

Appendix C About QoS

PLC 200AV allows for 4 levels of Channel Access Priority (CAP (0 – 3)). The 8 levels of VLAN Ethernet tags must be mapped to the 4 levels of CAP priority, where CAP 3 is the highest priority and CAP 0 is the lowest. CAP 3 priority might be used for voice and network management frames, and CAP 2 is used for streaming video and music while CAP 1 and CAP 0 are used for data.

Default CAP

The 'Default CAP' group allows for default priority mapping of packets that do not have a VLAN TAG. The settings are available for Unicast (directed to a host).

- IGMP - (default CAP 3) - sets the channel access priority for IGMP frames - these are the group management frames, not the stream data.
- Unicast - (default CAP 1) - sets the default channel access priority for unicast frames not matching any other classification or mapping.
- IGMP managed Multicast Stream (Fixed to CAP 2) - sets the default channel access priority for stream data belonging to a snooped IGMP multicast group.
- Multicast/Broadcast - sets the default CAP for multicast frames not in a snooped group and for broadcast frames.

The following are the factory default settings for VLAN Tags and TOS Bits:

VLAN Tag User Priority	Default CAP Priority	TOS Bit User Priority	Default CAP Priority
0	CAP1	0	CAP1
1	CAP0	1	CAP0
2	CAP0	2	CAP0
3	CAP1	3	CAP1
4	CAP2	4	CAP2
5	CAP2	5	CAP2
6	CAP3	6	CAP3
7	CAP3	7	CAP3

Shenzhen Landing Electronics Co.,Ltd
Address: 3F Block A,BaiyingBuilding,No.1019 Nanhai Road,
Nanshan District,Shenzhen,Guangdong, China
Post Code:518067
E-Mail: sales@goldwebcn.com
Website: http://www.goldwebcn.com